

**ВВГзнг 3х150-1**  
**ТУ У 31.3-00214534-018-2003**

Power cables with copper conductors, with PVC-compound insulation, with low-flammable PVC-compound outer sheath

Cables are used for laying:

- *in bunches*
- *in premises, dry ducts and tunnels, in corrosive environment*

Fire safety code in accordance with ДСТУ 4809:2007: ПБ120000000

Products of this mark meet the requirements:

- *single wire cable flame retardance*
- *bunched cable flame retardance category A*

**TECHNICAL SPECIFICATIONS**

|                                                                          |                 |                  |
|--------------------------------------------------------------------------|-----------------|------------------|
| Rated voltage                                                            | kV              | 1                |
| Number and rated area of conductors                                      | mm <sup>2</sup> | 3 x 150          |
| Phase insulation thickness                                               | mm              | 1.8              |
| Permissible continious current rating (AC of industrial frequency) *     |                 |                  |
| • <i>by aerial laying</i>                                                | A               | 346              |
| • <i>by burial</i>                                                       | A               | 358              |
| Maximum permissible conductor temperature                                |                 |                  |
| • <i>Continuous</i>                                                      | °C              | +70              |
| • <i>in emergency operation</i>                                          | °C              | +90              |
| • <i>at short circuit</i>                                                | °C              | +160             |
| Operating temperature range                                              | °C              | -50 ... +50      |
| Minimum bending radius by laying                                         | mm              | 315              |
| Rated outer diameter of the cable (for reference) **                     | mm              | 42               |
| Cable weight (approximate)                                               | kg/km           | 5060             |
| Rated factory cable length and gross weight of the delivery on the drums | m, t            | # 16a: 570 • 3.1 |
|                                                                          |                 | # 18: 660 • 3.8  |
|                                                                          |                 | # 20: 1050 • 6.0 |

Notes:

*When ordering it is necessary to agree the factory length of the product with the manufacturer*


\* Long permissible current loads are calculated for the following conditions: air temperature plus 25 °C, soil temperature plus 15 °C, thermal resistivity of soil 1.2 °K·m/W, laying depth in the soil 0.7 m

\*\* The external diameter may differ from the rated up to ± 10 %



## **ВВГзнг 3х150-1** **ТУ У 31.3-00214534-018-2003**

Power cables with copper conductors, with PVC-compound insulation, with low-flammable PVC-compound outer sheath

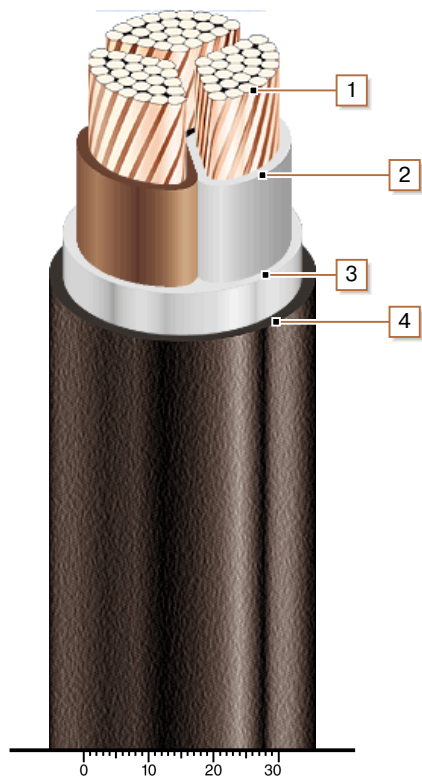

### **CONSTRUCTION**

1. Copper multiwire compact conductor
2. PVC compound insulation
3. PVC compound belt insulation
4. Low flammable PVC compound outer sheath

*Note: conductor twisting is not illustrated*