



## **АПвЕгПнг-6 3х120 ТУ У 31.3-00214534-017-2003**

Power cables with aluminium conductors, flame-retardant, with XLPE, longitudinal screen sealing and polymer compound outer sheath

---

Technical cable requirements correspond to IEC 60502-2

---

Cables are used for laying:

- *in premises, tunnels, ducts, mines, dry soil and outdoor under shelter*
- *single laying*

---

It is possible to manufacture cables with extruded semiconductor layer along outer sheath.

Order entry example:

АПвЕгПнг-П-6 3х120/16 ТУ У 31.3-00214534-017-2003

An extruded semiconductor layer along outer sheath ensures the correct testing of cable line with sections of underground laying in polymer pipes.

---

It is possible to manufacture cables with an integrated fiber-optic module.

Order entry example:

АПвЕгПнг-6 3х120/16 (ОМ) ТУ У 31.3-00214534-017-2003

In conjunction with the DTS system, the integrated fiber-optic module can act as a distributed cable line temperature sensor.

---

It is possible to manufacture cable with sealed conductors.

Order entry example:

АПвЕгПнг-6 3х120/16 (г) ТУ У 31.3-00214534-017-2003

---

It is possible manufacturing of cables in versions (A) and (B), flame-retardant when laying in bunches

---

Fire safety code in accordance with ДСТУ 4809:2007: ПБ101122000

Products of this mark meet the requirements:

- *single wire cable flame retardance*
- *toxicity class Tk1 of the combustion products of nonmetallic elements (toxicity index from 13 up to 40 g/m<sup>3</sup>)*
- *class ДТк1 on smoke-forming ability by smouldering of non-metallic elements (coefficient of smoke formation from 50 to 500 m<sup>2</sup>/kg)*
- *class ДПк2 on smoke-forming ability by combustion (minimum luminous flux more than 60 %)*
- *corrosive class Кк2 of combustion products of non-metallic elements (the number of halogen hydrides less than 150 mg/g, pH more than 4.3, specific conductivity less than 10 μS/mm)*



## АПвЕгПнг-6 3x120 ТУ У 31.3-00214534-017-2003

Power cables with aluminium conductors, flame-retardant, with XLPE, longitudinal screen sealing and polymer compound outer sheath

### TECHNICAL SPECIFICATIONS

|                                                                              |                 |                                                                        |
|------------------------------------------------------------------------------|-----------------|------------------------------------------------------------------------|
| Rated voltage                                                                | kV              | 6                                                                      |
| Maximum voltage                                                              | kV              | 7.2                                                                    |
| Number and rated area of conductors                                          | mm <sup>2</sup> | 3 x 120                                                                |
| Insulation thickness                                                         | mm              | 2.5                                                                    |
| Minimum screen cross-section                                                 | mm <sup>2</sup> | 16                                                                     |
| Permissible short circuit current across the screen of minimum cross-section | kA              | 3.3                                                                    |
| Maximum permissible short-circuit current in core                            | kA              | 11.3                                                                   |
| Permissible continuous current rating *                                      |                 |                                                                        |
| • by aerial laying                                                           | A               | 273                                                                    |
| • by burial                                                                  | A               | 232                                                                    |
| Partial discharge factor for rated voltage, not more than                    | pC              | 6                                                                      |
| Maximum permissible conductor temperature                                    |                 |                                                                        |
| • Continuous                                                                 | °C              | +90                                                                    |
| • in emergency operation                                                     | °C              | +130                                                                   |
| • at short circuit                                                           | °C              | +250                                                                   |
| Operating temperature range                                                  | °C              | -60 ... +50                                                            |
| Minimum bending radius by laying                                             | mm              | 960                                                                    |
| Rated outer diameter of the cable (for reference) **                         | mm              | 60                                                                     |
| Cable weight (approximate)                                                   | kg/km           | 3940                                                                   |
| Rated factory cable length and gross weight of the delivery on the drums *** | m, t            | # 18аУД-40: 404 • 2.1<br># 20аУД-60: 500 • 2.7<br># 25УД-90: 838 • 4.9 |

#### Notes:

When ordering it is necessary to agree the factory length of the product with the manufacturer

\* Long permissible current loads are calculated for the following conditions: conductor temperature 90 °C, air temperature 30 °C, soil temperature 20 °C, load factor 1.0, thermal resistivity of soil 1.5 °K•m/W, laying depth in the ground 0.8 m, shields are grounded at both ends of the line


\*\* The external diameter may differ from the rated up to ± 10 %

\*\*\* Отклонение фактической массы брутто от указанного значения может составлять ± 7 %



## АПвЕгПнг-6 3x120 ТУ У 31.3-00214534-017-2003

Power cables with aluminium conductors, flame-retardant, with XLPE, longitudinal screen sealing and polymer compound outer sheath

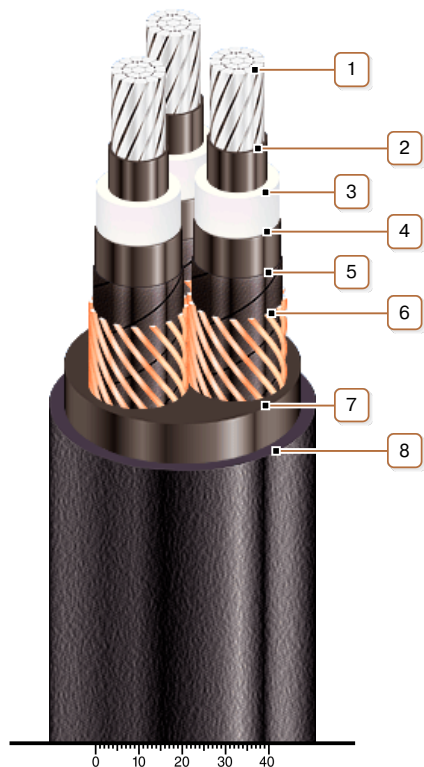

### CONSTRUCTION

#### 1. Aluminium multiwire compacted conductor

Notes:

- It is possible to manufacture cable with a single-wire conductor
- It is possible to manufacture cable with sealed conductors.

#### 2. Inner extruded semiconducting layer

#### 3. XLPE insulation

#### 4. Outer extruded semiconducting layer

#### 5. Lapping layer of semiconductive swellable tape

#### 6. Copper screen

#### 7. Extruded filling of PVC compound

#### 8. Flame-retardant polymer compound outer sheath

Note: It is possible to manufacture cable with extruded semiconductor layer along outer sheath

Note: Conductor twisting is not illustrated