



## **ПвЕВ-6 1х1000** **ТУ У 31.3-00214534-017-2003**

Power cables with copper conductors, with XLPE and with PVC compound outer sheath

For the cable of this mark correspond the foreign-made analogues:

N2XSY (DE) • 2XSY (DE) • Cu/XLPE/CWS/PVC (GB) • YHKXS (PL) • ПвВ (RU)

Technical cable requirements correspond to IEC 60502-2

Cables are used for laying:

- *in premises, tunnels, ducts, mines, dry soil and outdoor under shelter*
- *single laying*

It is possible to manufacture cable with a segmented conductor

It is possible to manufacture cables with an integrated fiber-optic module.

Order entry example:

ПвЕВ-6 1х1000/70 (OM) ТУ У 31.3-00214534-017-2003

In conjunction with the DTS system, the integrated fiber-optic module can act as a distributed cable line temperature sensor.

It is possible to manufacture cable with sealed conductor.


Order entry example:

ПвЕВ-6 1х1000/70 (r) ТУ У 31.3-00214534-017-2003

Fire safety code in accordance with ДСТУ 4809:2007: ПБ100000000

Products of this mark meet the requirements:

- *single wire cable flame retardance*



## ПвБВ-6 1x1000 ТУ У 31.3-00214534-017-2003

Power cables with copper conductors, with XLPE and with PVC compound outer sheath

### TECHNICAL SPECIFICATIONS

|                                                                              |                 |                                                    |
|------------------------------------------------------------------------------|-----------------|----------------------------------------------------|
| Rated voltage                                                                | kV              | 6                                                  |
| Maximum voltage                                                              | kV              | 7.2                                                |
| Number and rated area of conductors                                          | mm <sup>2</sup> | 1 x 1000                                           |
| Insulation thickness                                                         | mm              | 3.2                                                |
| Minimum screen cross-section                                                 | mm <sup>2</sup> | 70                                                 |
| Permissible short circuit current across the screen of minimum cross-section | kA              | 14.2                                               |
| Maximum permissible short-circuit current in core                            | kA              | 143                                                |
| Permissible continuous current rating *                                      |                 |                                                    |
| • by aerial laying in trefoil formation                                      | A               | 1460                                               |
| • by aerial flat laying                                                      | A               | 1516                                               |
| • by burial in trefoil formation                                             | A               | 881                                                |
| • by burial flat                                                             | A               | 732                                                |
| Partial discharge factor for rated voltage, not more than                    | pC              | 6                                                  |
| Maximum permissible conductor temperature                                    |                 |                                                    |
| • Continuous                                                                 | °C              | +90                                                |
| • in emergency operation                                                     | °C              | +130                                               |
| • at short circuit                                                           | °C              | +250                                               |
| Operating temperature range (in climate version NF)                          | °C              | -50 ... +50                                        |
| Operating temperature range (in climate version T)                           | °C              | -25 ... +65                                        |
| Minimum bending radius by laying                                             | mm              | 912                                                |
| Rated outer diameter of the cable (for reference) **                         | mm              | 57                                                 |
| Cable weight (approximate)                                                   | kg/km           | 11090                                              |
| Rated factory cable length and gross weight of the delivery on the drums *** | m, t            | # 22УД-60: 499 • 6.5<br># 25УД-90: **** 760 • 10.0 |

#### Notes:

When ordering it is necessary to agree the factory length of the product with the manufacturer

\* Long permissible current loads are calculated for the following conditions: conductor temperature 90 °C, air temperature 30 °C, soil temperature 20 °C, thermal resistivity of soil 1.5 °K·m/W, laying depth in the soil 0.8 m, while laying in flat formation the distance between cables in clear is equal to the cable diameter, while laying in trefoil formation cables are laid side by side, shields are earthed on both ends of the line

\*\* The external diameter may differ from the rated up to ± 10 %


\*\*\* Отклонение фактической массы брутто от указанного значения может составлять ± 7 %

\*\*\*\* Option delivery on not full drum



## **ПвЕВ-6 1x1000** **ТУ У 31.3-00214534-017-2003**

Power cables with copper conductors, with XLPE and with PVC compound outer sheath

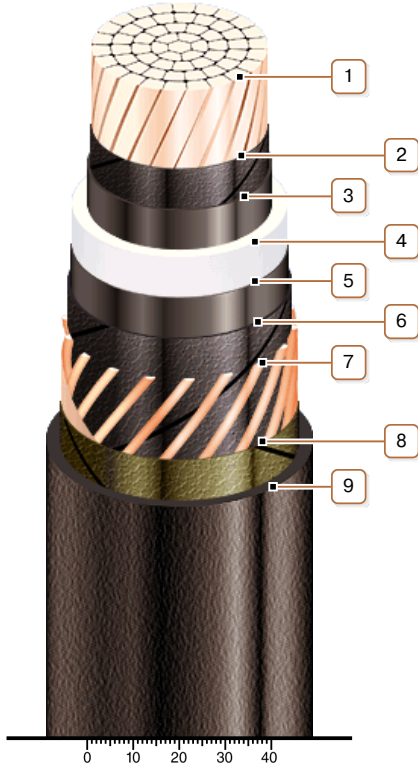

### **CONSTRUCTION**

#### **1. Copper multiwire compact conductor**

Notes:

- It is possible to manufacture cable with a segmented conductor
- It is possible to manufacture cable with sealed conductor.

#### **2. Lapping layer of semiconductive swellable tape**

#### **3. Inner extruded semiconducting layer**

#### **4. XLPE insulation**

#### **5. Outer extruded semiconducting layer**

#### **6. Lapping layer of semiconductive swellable tape**

#### **7. Copper screen**

#### **8. Lapping layer of nonwoven cloth tape**

#### **9. PVC compound outer sheath**