

## ААБлГ 3x150+1x70-1 ТУ У 27.3-00214534-091:2017

Power cables with aluminium conductors, with impregnated paper insulation, aluminium-sheathed, steel-tape armoured

Cables are used for laying:

- in dry premises (tunnels), ducts, cable cellars, mines, collectors, industrial and other premises, including damp, partially flooded premises, environment with medium and high corrosiveness
- in fire-risk premises
- on technological trestles
- on special cable bridges
- on bridges
- with a risk of mechanical damage and no tensile forces in operation

Fire safety code in accordance with ДСТУ 4809:2007: ПБ100000000

Products of this mark meet the requirements:

- single wire cable flame retardance

### TECHNICAL SPECIFICATIONS

|                                                                              |                 |                  |
|------------------------------------------------------------------------------|-----------------|------------------|
| Rated voltage                                                                | kV              | 1                |
| Number and rated area of conductors                                          | mm <sup>2</sup> | 3 x 150 + 1 x 70 |
| Insulation thickness between conductors                                      | mm              | 1.7              |
| Insulation thickness of conductor-sheath                                     | mm              | 1.45             |
| Sheath thickness                                                             | mm              | 1.55             |
| Permissible continuous current rating *                                      |                 |                  |
| • by aerial laying                                                           | A               | 300              |
| • by burial                                                                  | A               | 281              |
| Operating temperature range                                                  | °C              | -50 ... +50      |
| Minimum bending radius by laying                                             | mm              | 1150             |
| Level difference along the laying route, not more than                       | m               | 25               |
| Metal sheath outer diameter (for reference only)                             | mm              | 40               |
| Rated outer diameter of the cable (for reference) **                         | mm              | 46               |
| Cable weight (approximate)                                                   | kg/km           | 3550             |
| Rated factory cable length and gross weight of the delivery on the drums *** | m, t            | # 18: 550 • 2.4  |

Notes:

When ordering it is necessary to agree the factory length of the product with the manufacturer


\* Long permissible current loads are calculated for the following conditions: air temperature plus 25 °C, soil temperature plus 15 °C, thermal resistivity of soil 1.2 °K·m/W, laying depth in the soil 0.7 m

\*\* The external diameter may differ from the rated up to ± 10 %



## ААБлГ 3x150+1x70-1 ТУ У 27.3-00214534-091:2017

Power cables with aluminium conductors, with impregnated paper insulation, aluminium-sheathed, steel-tape armoured

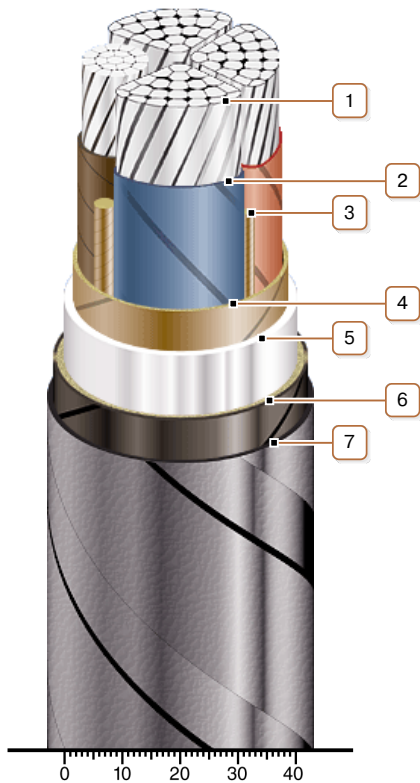

### CONSTRUCTION

1. Aluminium multiwire compacted conductor
2. Impregnated paper insulation
3. Cable paper bundle
4. Belt insulation
5. Aluminium sheath
6. Single-layer plastic-tape bedding
7. Double galvanized steel-tape armour

*Note: Conductor twisting is not illustrated*