



## ВБШнгд 5х35-1 ТУ У 31.3-00214534-018-2003

Power cables with copper conductors, with low-flammable PVC-compound insulation, galvanized steel-tape armoured, with PVC-compound protection hose

Cables are used for laying:

- *in bunches*
- *in premises, dry ducts and tunnels, in corrosive environment*
- *in places, where small mechanical impacts on cable are possible, including tensile forces*
- *in bunches, in crowded places*

Manufacturing of cable with multiwire conductors is possible

Fire safety code in accordance with ДСТУ 4809:2007: ПБ123121000

Products of this mark meet the requirements:

- *single wire cable flame retardance*
- *bunched cable flame retardance category A*
- *toxicity class Tk3 of the combustion products of nonmetallic elements (toxicity index over 120 g/m<sup>3</sup>)*
- *class ДТк1 on smoke-forming ability by smouldering of non-metallic elements (coefficient of smoke formation from 50 to 500 m<sup>2</sup>/kg)*
- *class ДПк2 on smoke-forming ability by combustion (minimum luminous flux more than 60 %)*
- *corrosive class Kk1 of combustion products of non-metallic elements (the number of halogen hydrides less than 150 mg/g, pH less than 4.3, specific conductivity more than 10 μS/mm)*

### TECHNICAL SPECIFICATIONS

|                                                                              |                 |                                                         |
|------------------------------------------------------------------------------|-----------------|---------------------------------------------------------|
| Rated voltage                                                                | kV              | 1                                                       |
| Number and rated area of conductors                                          | mm <sup>2</sup> | 5 x 35                                                  |
| Phase insulation thickness                                                   | mm              | 1.2                                                     |
| Permissible continious current rating (AC of industrial frequency) *         |                 |                                                         |
| • <i>by aerial laying</i>                                                    | A               | 127                                                     |
| • <i>by burial</i>                                                           | A               | 146                                                     |
| Maximum permissible conductor temperature                                    |                 |                                                         |
| • <i>Continuous</i>                                                          | °C              | +70                                                     |
| • <i>in emergency operation</i>                                              | °C              | +80                                                     |
| • <i>at short circuit</i>                                                    | °C              | +130                                                    |
| Operating temperature range                                                  | °C              | -50 ... +50                                             |
| Minimum bending radius by laying                                             | mm              | 255                                                     |
| Rated outer diameter of the cable (for reference) **                         | mm              | 34                                                      |
| Cable weight (approximate)                                                   | kg/km           | 2650                                                    |
| Rated factory cable length and gross weight of the delivery on the drums *** | m, t            | # 14: 540 • 1.6<br># 16a: 870 • 2.6<br># 18: 1000 • 3.1 |

Notes:

When ordering it is necessary to agree the factory length of the product with the manufacturer


\* Long permissible current loads are calculated for the following conditions: air temperature plus 25 °C, soil temperature plus 15 °C, thermal resistivity of soil 1.2 °K·m/W, laying depth in the soil 0.7 m

\*\* The external diameter may differ from the rated up to ± 10 %



## **ВБШнгд 5х35-1** **ТУ У 31.3-00214534-018-2003**

Power cables with copper conductors, with low-flammable PVC-compound insulation, galvanized steel-tape armoured, with PVC-compound protection hose

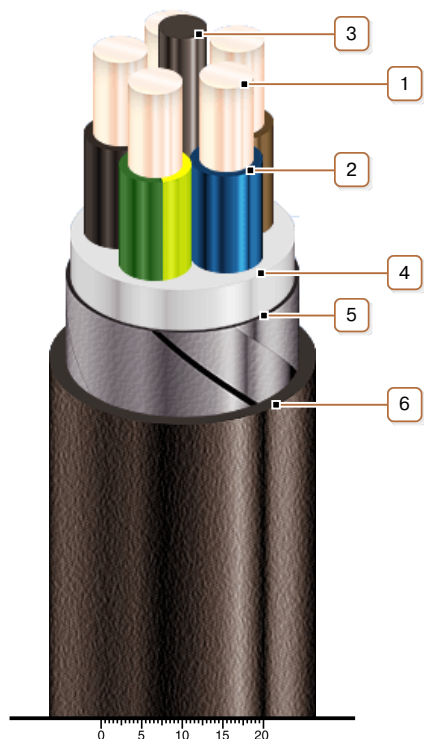

### **CONSTRUCTION**

1. Copper conductor
2. Low fire-risk PVC compound insulation
3. Low fire-risk PVC-compound bundle
4. Low fire-risk PVC-compound inner sheath
5. Double galvanized steel-tape armour
6. Pressed off low fire-risk PVC compound protection hose

*Note: Conductor twisting is not illustrated*