**АВВГзнг 3х120+1х70 (ож)-1**  
**ТУ У 31.3-00214534-018-2003**

Power cables with aluminium conductors, with PVC-compound insulation, with low-flammable PVC-compound outer sheath

Cables are used for laying:

- *in bunches*
- *in premises, dry ducts and tunnels, in corrosive environment*

Manufacturing of cable with multiwire conductors (main and additional one) is possible

Fire safety code in accordance with ДСТУ 4809:2007: ПБ120000000

Products of this mark meet the requirements:

- *single wire cable flame retardance*
- *bunched cable flame retardance category A*

**TECHNICAL SPECIFICATIONS**

|                                                                              |                 |                                                         |
|------------------------------------------------------------------------------|-----------------|---------------------------------------------------------|
| Rated voltage                                                                | kV              | 1                                                       |
| Number and rated area of conductors                                          | mm <sup>2</sup> | 3 x 120 + 1 x 70                                        |
| Phase insulation thickness                                                   | mm              | 1.6                                                     |
| Permissible continuous current rating (AC of industrial frequency) *         |                 |                                                         |
| • <i>by aerial laying</i>                                                    | A               | 229                                                     |
| • <i>by burial</i>                                                           | A               | 244                                                     |
| Maximum permissible conductor temperature                                    |                 |                                                         |
| • <i>Continuous</i>                                                          | °C              | +70                                                     |
| • <i>in emergency operation</i>                                              | °C              | +90                                                     |
| • <i>at short circuit</i>                                                    | °C              | +160                                                    |
| Operating temperature range                                                  | °C              | -50 ... +50                                             |
| Minimum bending radius by laying                                             | mm              | 315                                                     |
| Rated outer diameter of the cable (for reference) **                         | mm              | 42                                                      |
| Cable weight (approximate)                                                   | kg/km           | 2280                                                    |
| Rated factory cable length and gross weight of the delivery on the drums *** | m, t            | # 16a: 570 • 1.6<br># 18: 660 • 2.0<br># 20: 1050 • 3.0 |

Notes:

When ordering it is necessary to agree the factory length of the product with the manufacturer


\* Long permissible current loads are calculated for the following conditions: air temperature plus 25 °C, soil temperature plus 15 °C, thermal resistivity of soil 1.2 °K·m/W, laying depth in the soil 0.7 m

\*\* The external diameter may differ from the rated up to ± 10 %



## АВВГзнг 3х120+1х70 (ож)-1 ТУ У 31.3-00214534-018-2003

Power cables with aluminium conductors, with PVC-compound insulation, with low-flammable PVC-compound outer sheath

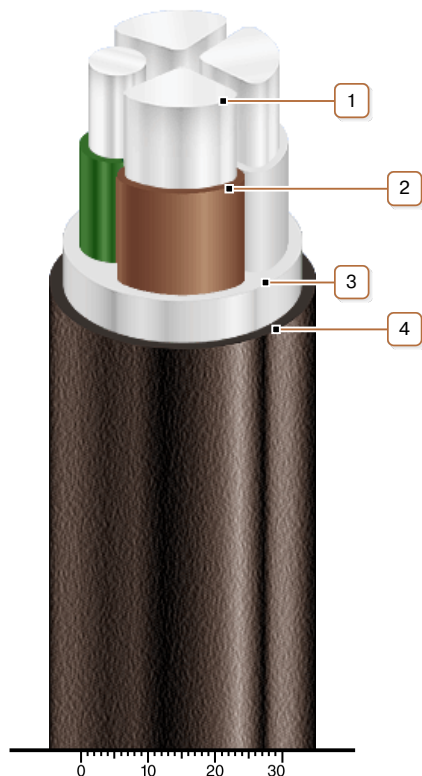

### CONSTRUCTION

1. Aluminium conductor
2. PVC compound insulation
3. PVC compound belt insulation
4. Low flammable PVC compound outer sheath

*Note: Conductor twisting is not illustrated*