

## ПВВГ 1x630-1 TY Y 31.3-00214534-048:2007

Power cables with copper conductors, XLPE-insulated, with PVC-compound outer sheath

Cables are used for laying:

- *single laying*
- *in premises, dry ducts and tunnels, in corrosive environment*

Fire safety code in accordance with ДСТУ 4809:2007: ПБ100000000

Products of this mark meet the requirements:

- *single wire cable flame retardance*

### TECHNICAL SPECIFICATIONS


|                                                                              |                 |                  |
|------------------------------------------------------------------------------|-----------------|------------------|
| Rated voltage                                                                | kV              | 1                |
| Number and rated area of conductors                                          | mm <sup>2</sup> | 1 x 630          |
| Phase insulation thickness                                                   | mm              | 2.4              |
| Permissible continious current rating (AC of industrial frequency) *         |                 |                  |
| • <i>by aerial laying</i>                                                    | A               | 1149             |
| • <i>by burial</i>                                                           | A               | 840              |
| Permissible continious current rating (DC) *                                 |                 |                  |
| • <i>by aerial laying</i>                                                    | A               | 1576             |
| • <i>by burial</i>                                                           | A               | 1416             |
| Maximum permissible conductor temperature                                    |                 |                  |
| • <i>Continuous</i>                                                          | °C              | +90              |
| • <i>in emergency operation</i>                                              | °C              | +130             |
| • <i>at short circuit</i>                                                    | °C              | +250             |
| Operating temperature range                                                  | °C              | -50 ... +50      |
| Minimum bending radius by laying                                             | mm              | 400              |
| Rated outer diameter of the cable (for reference) **                         | mm              | 40               |
| Cable weight (approximate)                                                   | kg/km           | 6280             |
| Rated factory cable length and gross weight of the delivery on the drums *** | m, t            | # 16a: 630 • 4.2 |
|                                                                              |                 | # 18: 720 • 5.0  |
|                                                                              |                 | # 20: 1160 • 7.9 |

Notes:

When ordering it is necessary to agree the factory length of the product with the manufacturer


\* Long permissible current loads are calculated for the following conditions: air temperature plus 25 °C, soil temperature plus 15 °C, thermal resistivity of soil 1.2 °K·m/W, laying depth in the soil 0.7 m

\*\* The external diameter may differ from the rated up to ± 10 %



**ПВВГ 1х630-1**  
**ТУ У 31.3-00214534-048:2007**

Power cables with copper conductors, XLPE-insulated, with PVC-compound outer sheath

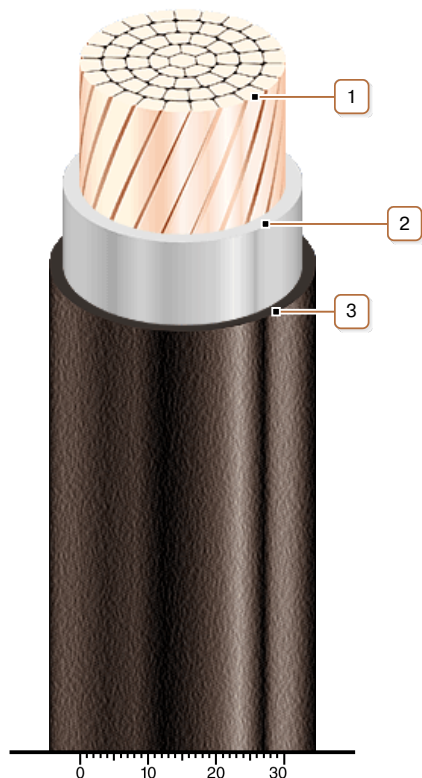

### CONSTRUCTION

1. *Copper multiwire compact conductor*
2. *XLPE insulation*
3. *PVC compound outer sheath*