



## **ПВЗКП 4x120-1** **ТУ У 31.3-00214534-016-2003**

Power cables with copper conductors, XLPE-insulated, with filling of intermediate spaces between the conductors, round-steel-wire armoured, with polyethylene outer sheath

Cables are used for laying:

- *in premises, tunnels, collectors, in soil (trenches), in corrosive environment*
- *in places, where intense tensile forces are possible (in cable lifting, in bulk, heaving, boggy, everfrost soils)*
- *in water at depth up to 10 m*

Manufacturing of cables with a different number and different design of conductors is possible

Manufacturing of single-phase cables with aluminium-wire armour is possible

Fire safety code in accordance with ДСТУ 4809:2007: ПБ100000000

Products of this mark meet the requirements:

- *single wire cable flame retardance*

### **TECHNICAL SPECIFICATIONS**

|                                                                              |                 |                                    |
|------------------------------------------------------------------------------|-----------------|------------------------------------|
| Rated voltage                                                                | kV              | 1                                  |
| Number and rated area of conductors                                          | mm <sup>2</sup> | 4 x 120                            |
| Phase insulation thickness                                                   | mm              | 1.2                                |
| Armor wire diameter                                                          | mm              | 2.8                                |
| Permissible continuous current rating (AC of industrial frequency) *         |                 |                                    |
| • <i>by aerial laying</i>                                                    | A               | 354                                |
| • <i>by burial</i>                                                           | A               | 322                                |
| Maximum permissible conductor temperature                                    |                 |                                    |
| • <i>Continuous</i>                                                          | °C              | +90                                |
| • <i>at short circuit</i>                                                    | °C              | +250                               |
| Operating temperature range                                                  | °C              | -60 ... +50                        |
| Minimum bending radius by laying                                             | mm              | 392                                |
| Rated outer diameter of the cable (for reference) **                         | mm              | 49                                 |
| Cable weight (approximate)                                                   | kg/km           | 7640                               |
| Rated factory cable length and gross weight of the delivery on the drums *** | m, t            | # 18: 460 • 4.0<br># 20: 740 • 6.3 |

Notes:

*When ordering it is necessary to agree the factory length of the product with the manufacturer*


*\* Long permissible current loads are calculated during operation in four-wire networks with load in all the conductors for the following conditions: air temperature plus 25 °C, soil temperature plus 15 °C, thermal resistivity of soil 1.2 °K·m/W, laying depth in the soil 0.7 m*

*\*\* The external diameter may differ from the rated up to ± 10 %*



## ПВЗКП 4x120-1 ТУ У 31.3-00214534-016-2003

Power cables with copper conductors, XLPE-insulated, with filling of intermediate spaces between the conductors, round-steel-wire armoured, with polyethylene outer sheath

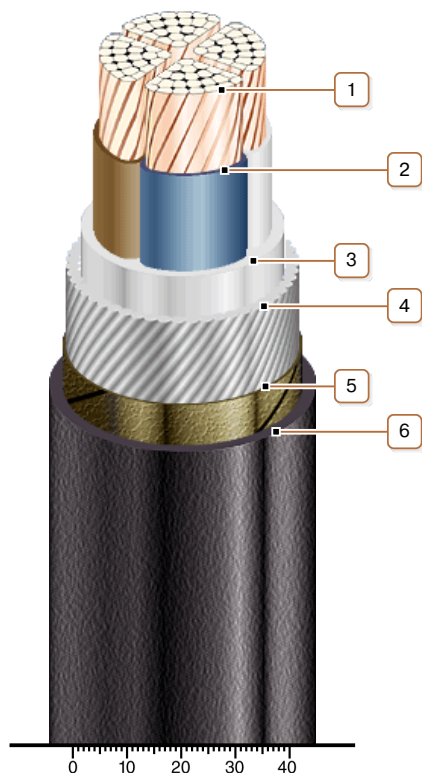

### CONSTRUCTION

1. Copper multiwire compact conductor

2. XLPE insulation

3. PVC compound belt insulation

4. Round galvanized steel-wire armour

*Note: Manufacturing of single-phase cables with aluminium-wire armour is possible*

5. Lapping layer of nonwoven cloth tape

6. Polyethylene outer sheath

*Note: Conductor twisting is not illustrated*