



## БКВнг 5x25-1 TY Y 31.3-00214534-016-2003

Power cables with copper conductors, with PVC-compound insulation, galvanized steel-wire armoured, with low-flammable PVC-compound outer sheath

Cables are used for laying:

- *in bunches*
- *in premises, dry ducts and tunnels, in corrosive environment*
- *in places, where intense tensile forces are possible (in cable lifting, in bulk, heaving, boggy, everfrost soils)*

Manufacturing of cables with a different number and different design of conductors is possible

Manufacturing of single-phase cables with aluminium-wire armour is possible

Fire safety code in accordance with ДСТУ 4809:2007: ПБ130000000

Products of this mark meet the requirements:

- *single wire cable flame retardance*
- *bunched cable flame retardance category B*

### TECHNICAL SPECIFICATIONS

|                                                                              |                 |                  |
|------------------------------------------------------------------------------|-----------------|------------------|
| Rated voltage                                                                | kV              | 1                |
| Number and rated area of conductors                                          | mm <sup>2</sup> | 5 x 25           |
| Phase insulation thickness                                                   | mm              | 1.2              |
| Aarmor wire diameter                                                         | mm              | 1.4              |
| Permissible continious current rating (AC of industrial frequency) *         |                 |                  |
| • <i>by aerial laying</i>                                                    | A               | 104              |
| • <i>by burial</i>                                                           | A               | 123              |
| Maximum permissible conductor temperature                                    |                 |                  |
| • <i>Continuous</i>                                                          | °C              | +70              |
| • <i>at short circuit</i>                                                    | °C              | +160             |
| Operating temperature range                                                  | °C              | -50 ... +50      |
| Minimum bending radius by laying                                             | mm              | 192              |
| Rated outer diameter of the cable (for reference) **                         | mm              | 32               |
| Cable weight (approximate)                                                   | kg/km           | 2450             |
| Rated factory cable length and gross weight of the delivery on the drums *** | m, t            | # 14: 610 • 1.7  |
|                                                                              |                 | # 16a: 990 • 2.7 |
|                                                                              |                 | # 18: 1130 • 3.2 |

Notes:

*When ordering it is necessary to agree the factory length of the product with the manufacturer*


\* Long permissible current loads are calculated for the following conditions: air temperature plus 25 °C, soil temperature plus 15 °C, thermal resistivity of soil 1.2 °K·m/W, laying depth in the soil 0.7 m

\*\* The external diameter may differ from the rated up to ± 10 %



**БКВнг 5x25-1**  
**ТУ У 31.3-00214534-016-2003**

Power cables with copper conductors, with PVC-compound insulation, galvanized steel-wire armoured, with low-flammable PVC-compound outer sheath

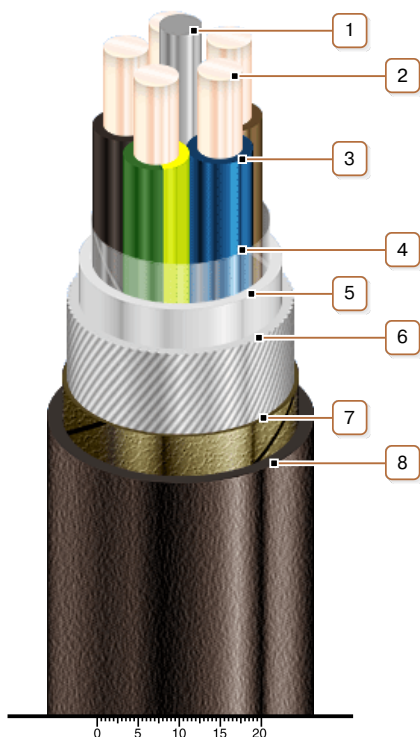

## CONSTRUCTION

1. PVC compound bundle
2. Copper conductor
3. PVC compound insulation
4. PET film winding
5. PVC compound belt insulation
6. Round galvanized steel-wire armour  
*Note: Manufacturing of single-phase cables with aluminium-wire armour is possible*
7. Lapping layer of nonwoven cloth tape
8. Low flammable PVC compound outer sheath

*Note: Conductor twisting is not illustrated*