



## ВВГнгд-К 4x150/70-1 ТУ У 31.3-00214534-048:2007

Power cables with copper conductors, with PVC compound insulation, with concentric conductor, with low fire-risk PVC-compound outer sheath

Cables are used for laying:

- *in bunches*
- *in premises, dry ducts and tunnels, in corrosive environment*
- *in bunches, in crowded places*
- *in locations, where a high level of electrical protection is required*

It is possible to manufacture armoured cable

Fire safety code in accordance with ДСТУ 4809:2007: ПБ123121000

Products of this mark meet the requirements:

- *single wire cable flame retardance*
- *bunched cable flame retardance category A*
- *toxicity class Tk3 of the combustion products of nonmetallic elements (toxicity index over 120 g/m<sup>3</sup>)*
- *class ДТк1 on smoke-forming ability by smouldering of non-metallic elements (coefficient of smoke formation from 50 to 500 m<sup>2</sup>/kg)*
- *class ДПк2 on smoke-forming ability by combustion (minimum luminous flux more than 60 %)*
- *corrosive class Кк1 of combustion products of non-metallic elements (the number of halogen hydrides less than 150 mg/g, pH less than 4.3, specific conductivity more than 10 μS/mm)*

### TECHNICAL SPECIFICATIONS

|                                                                              |                 |                                    |
|------------------------------------------------------------------------------|-----------------|------------------------------------|
| Rated voltage                                                                | kV              | 1                                  |
| Number and rated area of conductors                                          | mm <sup>2</sup> | 4 x 150                            |
| Nominal cross-section area of concentric conductor                           | mm <sup>2</sup> | 70                                 |
| Phase insulation thickness                                                   | mm              | 1.8                                |
| Permissible continuous current rating (AC of industrial frequency) *         |                 |                                    |
| • <i>by aerial laying</i>                                                    | A               | 321                                |
| • <i>by burial</i>                                                           | A               | 332                                |
| Maximum permissible conductor temperature                                    |                 |                                    |
| • <i>Continuous</i>                                                          | °C              | +70                                |
| • <i>at short circuit</i>                                                    | °C              | +130                               |
| Operating temperature range                                                  | °C              | -50 ... +50                        |
| Minimum bending radius by laying                                             | mm              | 397.5                              |
| Rated outer diameter of the cable (for reference) **                         | mm              | 53                                 |
| Cable weight (approximate)                                                   | kg/km           | 7670                               |
| Rated factory cable length and gross weight of the delivery on the drums *** | m, t            | # 18: 400 • 3.5<br># 20: 630 • 5.5 |

Notes:

When ordering it is necessary to agree the factory length of the product with the manufacturer


\* Long permissible current loads are calculated during operation in four-wire networks with load in all the conductors for the following conditions: air temperature plus 25 °C, soil temperature plus 15 °C, thermal resistivity of soil 1.2 °K·m/W, laying depth in the soil 0.7 m

\*\* The external diameter may differ from the rated up to ± 10 %



## **ВВГнгд-К 4x150/70-1** **ТУ У 31.3-00214534-048:2007**

Power cables with copper conductors, with PVC compound insulation, with concentric conductor, with low fire-risk PVC-compound outer sheath

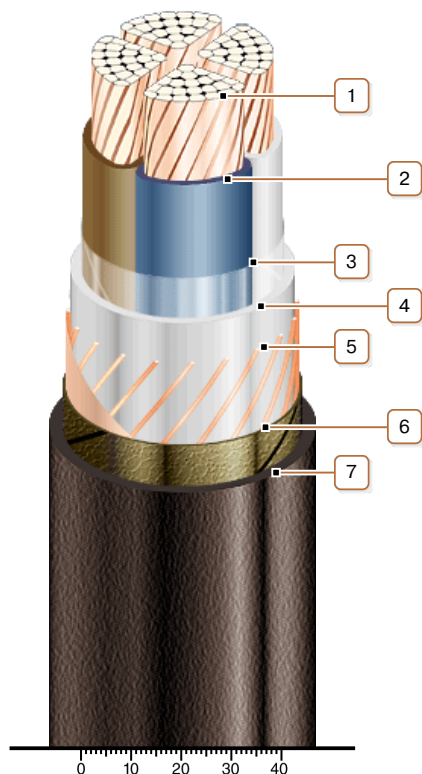

### **CONSTRUCTION**

1. Copper multiwire compact conductor
2. Low fire-risk PVC compound insulation
3. PET film winding
4. Low fire-risk PVC-compound inner sheath
5. Concentric copper conductor
6. Lapping layer of nonwoven cloth tape
7. Low fire-risk PVC compound outer sheath

*Note: Conductor twisting is not illustrated*