7, Autogennaya Str., Kharkov, 61099, Ukraine. Phone: (+38-057) 728-1244, 728-1241. Fax: (+38-057) 728-1243, (+38-0572) 946-830
E-mail: market@yuzhcable.com.ua

154501-062003000240

СБвШнгд 3х240-6
ТУ У 27.3-00214534-091:2017

Power cables with copper conductors, with impregnated paper insulation, lead-sheathed, steel-tape armoured, with low-flammable PVC-compound protection hose

Cables are used for laying:

- *in dry premises (tunnels), ducts, cable cellars, mines, collectors, industrial and other premises, including damp, partially flooded premises, environment with medium and high corrosivenes*
- *in fire-risk premises*
- *on special cable bridges*
- *with a risk of mechanical damage and no tensile forces in operation*
- *at sites, where low smoke and gas emission are required in the process of combustion and smouldering: NPP, electrical generating stations, subway, high-rise buildings, large industrial facilities and etc.*

Fire safety code in accordance with ДСТУ 4809:2007: ПБ123121000

Products of this mark meet the requirements:

- *single wire cable flame retardance*
- *bunched cable flame retardance category A*
- *toxicity class Тк3 of the combustion products of nonmetallic elements (toxicity index over 120 g/m^3)*
- *class ДТк1 on smoke-forming ability by smouldering of non-metallic elements (coefficient of smoke formation from 50 to 500 m^2/kg)*
- *class ДПк2 on smoke-forming ability by combustion (minimum luminous flux more than 60 %)*
- *corrosive class Кк1 of combustion products of non-metallic elements (the number of halogen hydrides less than 150 mg/g, pH less than 4.3, specific conductivity more than 10 μS/mm)*

© 2024 PJSC Yuzhcable Works. © 2024 A. Kevorkyan

YUZHCABLE
PRODUCTION GUIDE

154501-062003000240

7, Autogennaya Str., Kharkov, 61099, Ukraine. Phone: (+38-057) 728-1244, 728-1241. Fax: (+38-057) 728-1243, (+38-0572) 946-830
E-mail: market@yuzhcable.com.ua

СБвШнгд 3х240-6
ТУ У 27.3-00214534-091:2017

Power cables with copper conductors, with impregnated paper insulation, lead-sheathed, steel-tape armoured, with low-flammable PVC-compound protection hose

TECHNICAL SPECIFICATIONS

Rated voltage	kV	6
Number and rated area of conductors	mm^2	3 x 240
Insulation thikness between conductors	mm	4
Insulation thikness of conductor-sheath	mm	2.95
Sheath thikness	mm	1.66
Permissible continious current rating *		
• *by aerial laying*	A	512
• *by burial*	A	448
Operating temperature range	˚C	-50 ... +50
Minimum bending radius by laying	mm	915
Level difference along the laying rout, not more than	m	15
Metal shaeth outer diameter (for reference only)	mm	48
Rated outer diameter of the cable (for reference) **	mm	61
Cable weight (approximate)	kg/km	13020
Rated factory cable length and gross weight of the delivery on the drums ***	m, t	# 18: 270 • 4.0

Notes:

When ordering it is neccesary to agree the factory length of the product with the manufacturer

** Long permissible current loads are calculated for the following conditions: air temperature plus 25 ˚C, soil temperature plus 15 ˚C, thermal resistivity of soil 1.2 ˚K•m/W, laying depth in the soil 0.7 m*

*** The external diameter may differ from the rated up to ± 10 %*

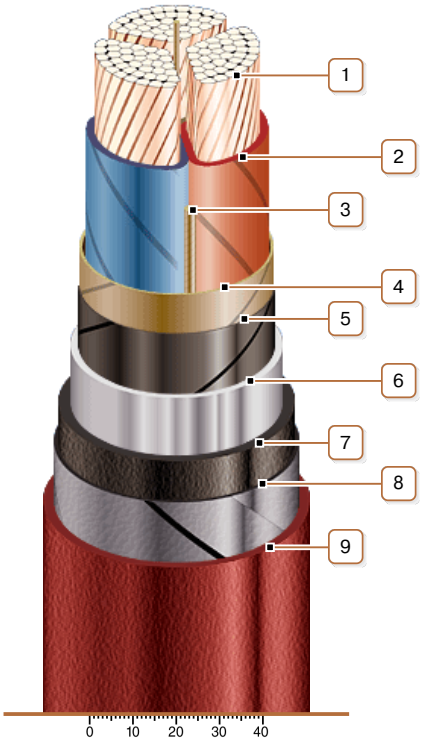

CONSTRUCTION

1. *Copper multiwire compact conductor*
2. *Impregnated paper insulation*
3. *Cable paper bundle*
4. *Belt insulation*
5. *Conducting paper screen*
6. *Lead sheath*
7. *Bedding with PVC compound moulded-in hose*
8. *Double galvanized steel-tape armour*
9. *Pressed off low fire-risk PVC compound protection hose*

Note: Conductor twisting is not illustrated

© 2024 PJSC Yuzhcable Works. © 2024 A. Kevorkyan