



7, Autogennaya Str., Kharkov, 61099, Ukraine. Phone: (+38-057) 728-1244, 728-1241. Fax: (+38-057) 728-1243, (+38-0572) 946-830 E-mail: market@yuzhcable.com.ua

## СБ 3x50(ож)-6 ТУ У 27.3-00214534-091:2017



Power cables with copper conductors, with impregnated paper insulation, lead-sheathed, steel-tape armoured

Cables are used for laying:

- · in soil (trenches) with medium corrosiveness without vagabond currents
- in soil (trenches) with low corrosiveness, as well as with vagabond currents
- in mines, non-hazardous as for gas and dust
- with a risk of mechanical damage and no tensile forces in operation

## **TECHNICAL SPECIFICATIONS**

Rated voltage	kV	6
Number and rated area of conductors	mm²	3 x 50
Insulation thikness between conductors	mm	4
Insulation thikness of conductor-sheath	mm	2.95
Sheath thikness	mm	1.26
Permissible continious current rating *		
• by aerial laying	А	200
• by burial	А	197
Operating temperature range	°C	-50 +50
Minimum bending radius by laying	mm	570
Level difference along the laying rout, not more than	m	15
Metal shaeth outer diameter (for reference only)	mm	26
Rated outer diameter of the cable (for reference) **	mm	38
Cable weight (approximate)	kg/km	3770
Rated factory cable length and gross weight of the delivery	m, t	# 16a: 700 • 2.9
on the drums ***		
N		

Notes:

When ordering it is neccesary to agree the factory length of the product with the manufacturer

\* Long permissible current loads are calculated for the following conditions: air temperature plus 25 °C, soil temperature plus 15 °C,

thermal resistivity of soil 1.2  $^{\circ}\!K\!\cdot\!m/W$ , laying depth in the soil 0.7 m

 $^{**}$  The external diameter may differ from the rated up to  $\pm$  10 %






7, Autogennaya Str., Kharkov, 61099, Ukraine. Phone: (+38-057) 728-1244, 728-1241. Fax: (+38-057) 728-1243, (+38-0572) 946-830 E-mail: market@yuzhcable.com.ua

## СБ 3х50(ож)-6 ТУ У 27.3-00214534-091:2017



Power cables with copper conductors, with impregnated paper insulation, lead-sheathed, steel-tape armoured

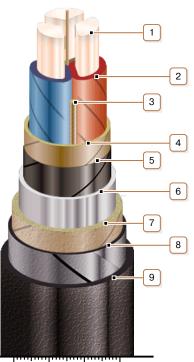

## CONSTRUCTION

- 1. Copper conductor
- 2. Impregnated paper insulation
- 3. Cable paper bundle
- 4. Belt insulation
- 5. Conducting paper screen
- 6. Lead sheath
- 7. Bedding
- 8. Double steel-tape armour
- 9. Outer covering

Note: Conductor twisting is not illustrated

0 10 20 30