

## **ПВБГ 3x185-1** **ГОСТ 16442-80, ТУ У 31.3-00214534-048:2007**

Power cables with copper conductors, XLPE-insulated, with PVC-compound outer sheath

Cables are used for laying:

- *single laying*
- *in premises, dry ducts and tunnels, in corrosive environment*

Manufacturing of cable with PVC compound belt insulation is possible

Fire safety code in accordance with ДСТУ 4809:2007: ПБ1000000000

Products of this mark meet the requirements:

- *single wire cable flame retardance*

### **TECHNICAL SPECIFICATIONS**

|  |                 |  |
|--|-----------------|--|
| Rated voltage  | kV              | 1  |
| Number and rated area of conductors  | mm <sup>2</sup> | 3 x 185  |
| Phase insulation thickness   | mm              | 1.6  |
| Permissible continious current rating (AC of industrial frequency) *         |                 |  |
| • <i>by aerial laying</i>  | A               | 504  |
| • <i>by burial</i>   | A               | 442  |
| Maximum permissible conductor temperature                                    |                 |  |
| • <i>Continuous</i>  | °C              | +90  |
| • <i>in emergency operation</i>  | °C              | +130   |
| • <i>at short circuit</i>  | °C              | +250   |
| Operating temperature range  | °C              | -50 ... +50  |
| Minimum bending radius by laying   | mm              | 330  |
| Rated outer diameter of the cable (for reference) **                         | mm              | 44   |
| Cable weight (approximate)   | kg/km           | 5720   |
| Rated factory cable length and gross weight of the delivery on the drums *** | m, t            | # 16a: 520 • 3.2<br># 18: 600 • 3.9<br># 20: 960 • 6.1 |

Notes:

When ordering it is necessary to agree the factory length of the product with the manufacturer


\* Long permissible current loads are calculated for the following conditions: air temperature plus 25 °C, soil temperature plus 15 °C, thermal resistivity of soil 1.2 °K·m/W, laying depth in the soil 0.7 m

\*\* The external diameter may differ from the rated up to ± 10 %



**ПВВГ 3x185-1**  
**ГОСТ 16442-80, ТУ У 31.3-00214534-048:2007**

Power cables with copper conductors, XLPE-insulated, with PVC-compound outer sheath

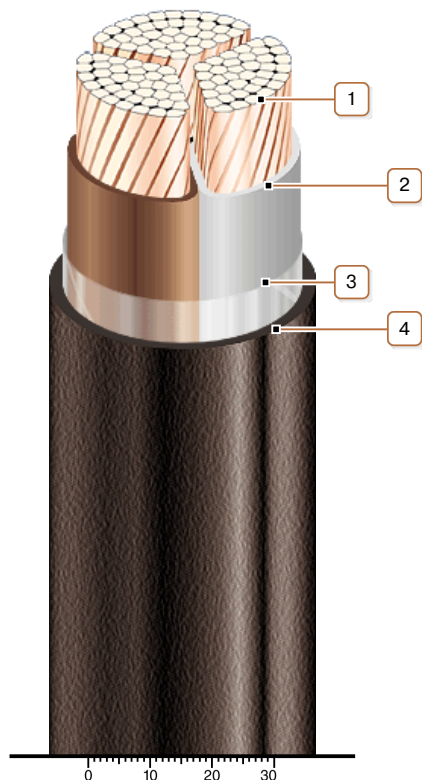

### CONSTRUCTION

1. Copper multiwire compact conductor
2. XLPE insulation
3. PET film winding
4. PVC compound outer sheath

*Note: Conductor twisting is not illustrated*