

## СІП-2 3x95+1x95+1x16

### ДСТУ 4743:2007, ТУ У 27.3-00214534-066:2013

Self-supporting wires with light-stabilized cross-linked polyethylene insulation, with neutral carrier insulated conductor

Used for laying:

- trunks of aerial electric power lines and line branches for the rated voltage of 0.6/1 kV
- in air, types II and III according to ГОСТ 15150-69, including on sea coasts, salt lakes, in industrial areas and areas of saline sands

It is possible to manufacture the wire with longitudinal core sealing by water-blocking materials

### TECHNICAL SPECIFICATIONS

|  |                 |                                    |
|--|-----------------|------------------------------------|
| Rated voltage  | kV              | 0.6 / 1                            |
| Number and rated area of phase conductors                                    | mm <sup>2</sup> | 3 x 95                             |
| Number and rated area of additional conductors for light circuits            | mm <sup>2</sup> | 1 x 16                             |
| Carrier neutral conductor rated area   | mm <sup>2</sup> | 95                                 |
| Phase insulation thickness   | mm              | 1.7                                |
| Current ratings *  |                 |                                    |
| • Continious   | A               | 300                                |
| • at short circuit (not more than 1 s)                                       | KA              | 8.8                                |
| Maximum permissible conductor temperature                                    |                 |                                    |
| • Continious   | °C              | +90                                |
| • at short circuit (not more than 5 s)                                       | °C              | +250                               |
| Operating temperature range  | °C              | -60 ... +50                        |
| Permissible temperature of laying (installation), no less than               | °C              | -20                                |
| Minimum bending radius by laying   | mm              | 447                                |
| Rated outer diameter of the cable (for reference) **                         | mm              | 44.7                               |
| Weight (approximate)   | kg/km           | 1350                               |
| Rated factory cable length and gross weight of the delivery on the drums *** | m, t            | # 18: 600 • 1.3<br># 20: 960 • 1.9 |

Notes:

When ordering it is necessary to agree the factory length of the product with the manufacturer

\* Long permissible current loads are calculated for the following conditions: ambient temperature plus 25 °C, wind speed 0.6 m/s, the intensity of solar radiation 1000 W/m<sup>2</sup>

\*\* The external diameter may differ from the rated up to ± 10 %




200203-013095116950



**СІП-2 3x95+1x95+1x16**  
**ДСТУ 4743:2007, ТУ У 27.3-00214534-066:2013**

Self-supporting wires with light-stabilized cross-linked polyethylene insulation, with neutral carrier insulated conductor

## CONSTRUCTION

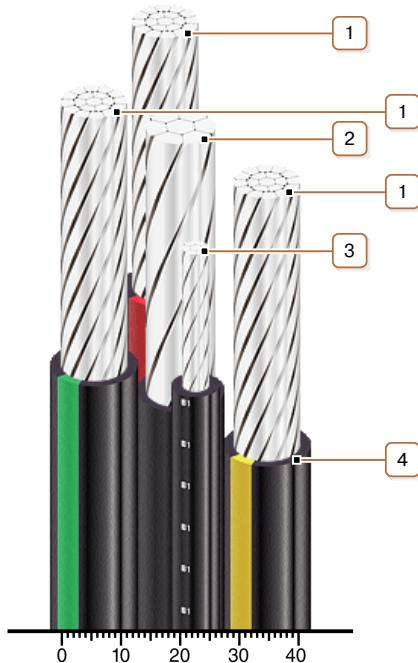

**1. Aluminium multiwire compacted conductor**

*Note: It is possible to manufacture the wire with longitudinal core sealing by water-blocking materials*

**2. Multiwire aluminium-alloy compacted supporting conductor**

*Note: It is possible to manufacture the wire with longitudinal core sealing by water-blocking materials*

**3. Multiwire compacted aluminium assisting conductor for light circuits**

**4. Light-stabilized cross-linked polyethylene insulation**

*Note: Wire lay-up is not illustrated.*