

7, Autogenaya Str., Kharkov, 61099, Ukraine. Phone: (+38-057) 728-1244, 728-1241. Fax: (+38-057) 728-1243, (+38-0572) 946-830  
 E-mail: market@yuzhcable.com.ua

## СІП-2 3x95+1x70+1x25 ДСТУ 4743:2007, ТУ У 27.3-00214534-066:2013

Self-supporting wires with light-stabilized cross-linked polyethylene insulation, with neutral carrier insulated conductor

Used for laying:

- trunks of aerial electric power lines and line branches for the rated voltage of 0.6/1 kV
- in air, types II and III according to ГОСТ 15150-69, including on sea coasts, salt lakes, in industrial areas and areas of saline sands

It is possible to manufacture the wire with longitudinal core sealing by water-blocking materials

### TECHNICAL SPECIFICATIONS

Rated voltage	kV	0.6 / 1
Number and rated area of phase conductors	mm <sup>2</sup>	3 x 95
Number and rated area of additional conductors for light circuits	mm <sup>2</sup>	1 x 25
Carrier neutral conductor rated area	mm <sup>2</sup>	70
Phase insulation thickness	mm	1.7
Current ratings *		
• <i>Continious</i>	A	300
• <i>at short circuit (not more than 1 s)</i>	KA	8.8
Maximum permissible conductor temperature		
• <i>Continious</i>	°C	+90
• <i>at short circuit (not more than 5 s)</i>	°C	+250
Operating temperature range	°C	-60 ... +50
Permissible temperature of laying (installation), no less than	°C	-20
Minimum bending radius by laying	mm	427
Rated outer diameter of the cable (for reference) **	mm	42.7
Weight (approximate)	kg/km	1290
Rated factory cable length and gross weight of the delivery on the drums ***	m, t	# 18: 660 • 1.3 # 20: 1050 • 2.0

Notes:


When ordering it is necessary to agree the factory length of the product with the manufacturer

\* Long permissible current loads are calculated for the following conditions: ambient temperature plus 25 °C, wind speed 0.6 m/s, the intensity of solar radiation 1000 W/m<sup>2</sup>

\*\* The external diameter may differ from the rated up to ± 10 %




200203-013095125700



**СІП-2 3x95+1x70+1x25**  
**ДСТУ 4743:2007, ТУ У 27.3-00214534-066:2013**

Self-supporting wires with light-stabilized cross-linked polyethylene insulation, with neutral carrier insulated conductor

## CONSTRUCTION

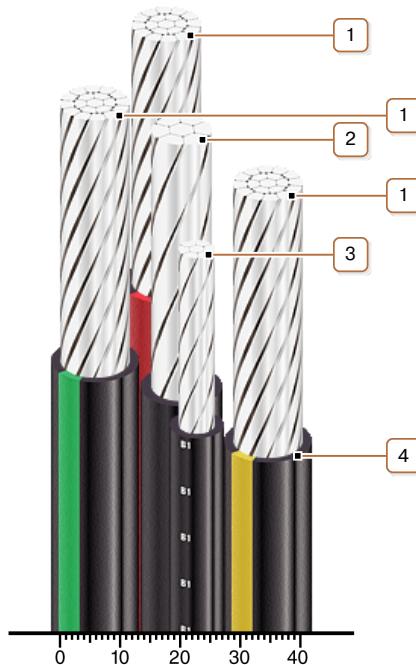

**1. Aluminium multiwire compacted conductor**

*Note: It is possible to manufacture the wire with longitudinal core sealing by water-blocking materials*

**2. Multiwire aluminium-alloy compacted supporting conductor**

*Note: It is possible to manufacture the wire with longitudinal core sealing by water-blocking materials*

**3. Multiwire compacted aluminium assisting conductor for light circuits**

**4. Light-stabilized cross-linked polyethylene insulation**

*Note: Wire lay-up is not illustrated.*