



200302-351185000000



## СІПн-3-35 1x185

## ДСТУ 4743:2007, ТУ У 27.3-00214534-066:2013

Single-core self-supporting high-voltage flame-retardant wires with polymer compound insulation

Used for laying:

- aerial electric power lines for the rated voltage from 10 kV till 35 kV
- in air, types II and III according to ГОСТ 15150-69, including on sea coasts, salt lakes, in industrial areas and areas of saline sands

It is possible to manufacture the wire with longitudinal core sealing by water-blocking materials

Fire safety code in accordance with ДСТУ 4809:2007: ПБ100000000

Products of this mark meet the requirements:

- single wire cable flame retardance

### TECHNICAL SPECIFICATIONS

Rated voltage	kV	35
Number and rated area of phase conductors	mm <sup>2</sup>	1 x 185
Phase insulation thickness	mm	3.5
Current ratings *		
• Continious	A	600
• at short circuit (not more than 1 s)	KA	15.9
Maximum permissible conductor temperature		
• Continious	°C	+90
• at short circuit (not more than 5 s)	°C	+250
Operating temperature range	°C	-60 ... +50
Permissible temperature of laying (installation), no less than	°C	-20
Minimum bending radius by laying	mm	230
Rated outer diameter of the cable (for reference) **	mm	23
Weight (approximate)	kg/km	710
Rated factory cable length and gross weight of the delivery on the drums ***	m, t	# 16a: 1760 • 1.5 # 18: 2010 • 1.9 # 20: 3210 • 2.9

Notes:

When ordering it is necessary to agree the factory length of the product with the manufacturer

\* Long permissible current loads are calculated for the following conditions: ambient temperature plus 25 °C, wind speed 0.6 m/s, the intensity of solar radiation 1000 W/m<sup>2</sup>

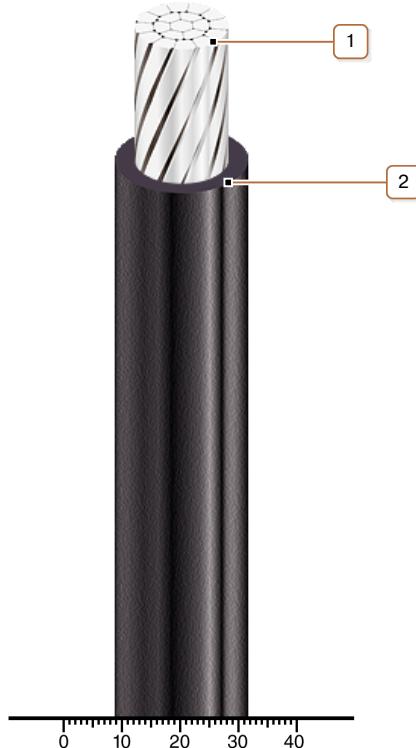
\*\* The external diameter may differ from the rated up to ± 10 %



200302-351185000000

**СІПн-3-35 1x185**  
**ДСТУ 4743:2007, ТУ У 27.3-00214534-066:2013**

Single-core self-supporting high-voltage flame-retardant wires with polymer compound insulation

**CONSTRUCTION****1. Multiwire aluminium-alloy compacted conductor**

*Note: It is possible to manufacture the wire with longitudinal core sealing by water-blocking materials*

**2. Flame-retardant polymer compound insulation**