7, Autogennaya Str., Kharkov, 61099, Ukraine. Phone: (+38-057) 728-1244, 728-1241. Fax: (+38-057) 728-1243, (+38-0572) 946-830
E-mail: market@yuzhcable.com.ua

280310-025002000250

АПНП 2 x 2.5
ТУ У 31.3-00214534-059:2008

Connecting flat household wires with aluminium conductors, PVC compound insulation, PVC compound outer sheath

Used for:

- *laying in lighting networks for AC voltage up to 250 V, including on the wooden constructions*

Fire safety code in accordance with ДСТУ 4809:2007: ПБ100000000
Products of this mark meet the requirements:

- *single wire cable flame retardance*

TECHNICAL SPECIFICATIONS

Rated voltage	kV	0.25
Number and rated area of conductors	mm^2	2 x 2.5
Insulation thikness	mm	0.5
Permissible continious current by aerial laying	A	11.2
Operating temperature range	°C	-15 ... +50
Flexibility class acc. to ГОСТ 22483-77		1
Minimum bending radius by laying	mm	33.5
Width and thickness (rated, for reference only)	mm	6.7 x 3.9
Weight (approximate)	kg/km	42

Notes:

When ordering it is neccesary to agree the factory length of the product with the manufacturer

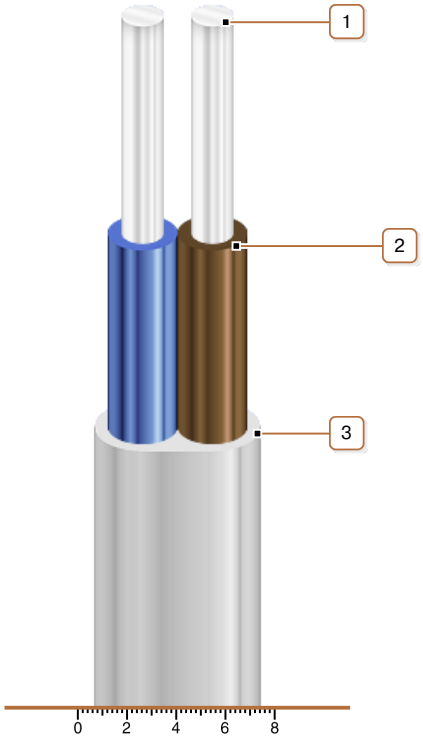

CONSTRUCTION

1. Aluminium conductor
2. PVC compound insulation
3. PVC compound outer sheath

© 2024 PJSC Yuzhcable Works. © 2024 A. Kevorkyan