7, Autogennaya Str., Kharkov, 61099, Ukraine. Phone: (+38-057) 728-1244, 728-1241. Fax: (+38-057) 728-1243, (+38-0572) 946-830
E-mail: market@yuzhcable.com.ua

200203-013025000546

СІП-2 3х25+1х54.6
ДСТУ 4743:2007, ТУ У 27.3-00214534-066:2013

Self-supporting wires with light-stabilized cross-linked polyethylene insulation, with neutral carrier insulated conductor

Used for laying:

- *trunks of aerial electric power lines and line branches for the rated voltage of 0.6/1 kV*
- *in air, types II and III according to ГОСТ 15150-69, including on sea coasts, salt lakes, in industrial areas and areas of saline sands*

It is possible to manufacture the wire with longitudinal core sealing by water-blocking materials

TECHNICAL SPECIFICATIONS

Rated voltage	kV	0.6 / 1
Number and rated area of phase conductors	mm^2	3 x 25
Carrier neutral conductor rated area	mm^2	54.6
Phase insulation thikness	mm	1.3
Current ratings *		
• *Continious*	A	130
• *at short circuit (not more than 1 s)*	kA	2.3
Maximum permissible conductor temperature		
• *Continious*	˚C	+90
• *at short circuit (not more than 5 s)*	˚C	+250
Operating temperature range	˚C	-60 ... +50
Permissible temperature of laying (installation), no less than	˚C	-20
Minimum bending radius by laying	mm	293
Rated outer diameter of the cable (for reference) **	mm	29.3
Weight (approximate)	kg/km	490
Rated factory cable length and gross weight of the delivery on the drums ***	m, t	# 16a: 1120 • 0.8 # 18: 1290 • 1.1 # 20: 2060 • 1.6

Notes:

When ordering it is neccesary to agree the factory length of the product with the manufacturer

** Long permissible current loads are calculated for the following conditions: ambient temperature plus 25 ˚C, wind speed 0.6 m/s, the intensity of solar radiation 1000 W/m^2*

*** The external diameter may differ from the rated up to ± 10 %*

© 2024 PJSC Yuzhcable Works. © 2024 A. Kevorkyan

7, Autogennaya Str., Kharkov, 61099, Ukraine. Phone: (+38-057) 728-1244, 728-1241. Fax: (+38-057) 728-1243, (+38-0572) 946-830
E-mail: market@yuzhcable.com.ua

200203-013025000546

СІП-2 3х25+1х54.6
ДСТУ 4743:2007, ТУ У 27.3-00214534-066:2013

Self-supporting wires with light-stabilized cross-linked polyethylene insulation, with neutral carrier insulated conductor

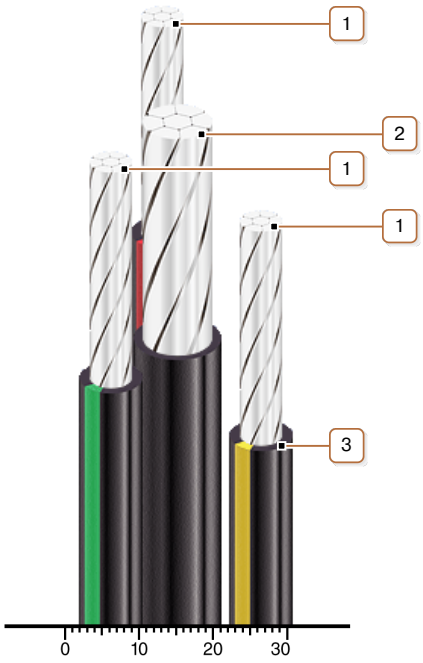

CONSTRUCTION

1. Aluminium multiwire compacted conductor
Note: It is possible to manufacture the wire with longitudinal core sealing by water-blocking materials

2. Multiwire aluminium-alloy compacted supporting conductor
Note: It is possible to manufacture the wire with longitudinal core sealing by water-blocking materials

3. Light-stabilized cross-linked polyethylene insulation

Note: Wire lay-up is not illustrated.

© 2024 PJSC Yuzhcable Works. © 2024 A. Kevorkyan