7, Autogennaya Str., Kharkov, 61099, Ukraine. Phone: (+38-057) 728-1244, 728-1241. Fax: (+38-057) 728-1243, (+38-0572) 946-830
E-mail: market@yuzhcable.com.ua

300201-066004000250

ПТМ 4х2.5
ТУ У 31.3-00214534-024-2004

Copper heat-resistant hook-up wires

Designed for installation of control and power circuits for electroguns and percussion-drilling machines in metal industry
Manufacturing of wires in tropical version is possible

TECHNICAL SPECIFICATIONS

Rated voltage	kV	0.66
Number and rated area of conductors	mm^2	4 x 2.5
Heat-resistance class		H (180 °C)
Minimum permissible environment temperature	°C	-60
Rated outer diameter of the cable (for reference) **	mm	13.53

Notes:

*** The external diameter may differ from the rated up to ± 10 %*

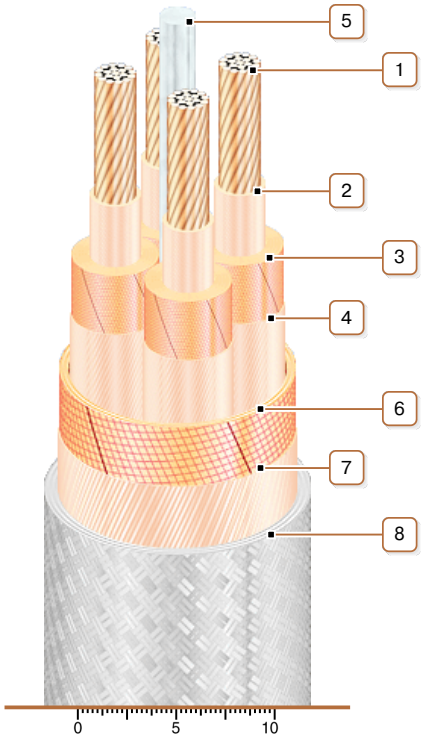

CONSTRUCTION

1. *Copper multiwire conductor*
2. *Glass-thread winding with silicone enamel pasting and impregnation*
3. *Varnished glass cloth winding*
4. *Glass-tape winding*
5. *Asbestos cord*
6. *Varnished glass cloth belt insulation*
7. *Glass-tape winding*
8. *Glass-thread braid*

© 2024 PJSC Yuzhcable Works. © 2024 A. Kevorkyan