7, Autogennaya Str., Kharkov, 61099, Ukraine. Phone: (+38-057) 728-1244, 728-1241. Fax: (+38-057) 728-1243, (+38-0572) 946-830
E-mail: market@yuzhcable.com.ua

300401-066001000050

ПВПИ 1х0.5
ТУ У 00214534.005-2000

Copper flexible wires with polyimide insulation

Designed for outputs of electric motors and heaters, can be used in metal industry

Fire safety code in accordance with ДСТУ 4809:2007: ПБ100000000
Products of this mark meet the requirements:
- *single wire cable flame retardance*

TECHNICAL SPECIFICATIONS

Rated voltage	kV	0.66
Number and rated area of conductors	mm^2	1 x 0.5
Heat-resistance class		200 (200 °C)
Minimum permissible environment temperature	°C	-60
Rated outer diameter of the cable (for reference) **	mm	1.5

Notes:

*** The external diameter may differ from the rated up to ± 10 %*

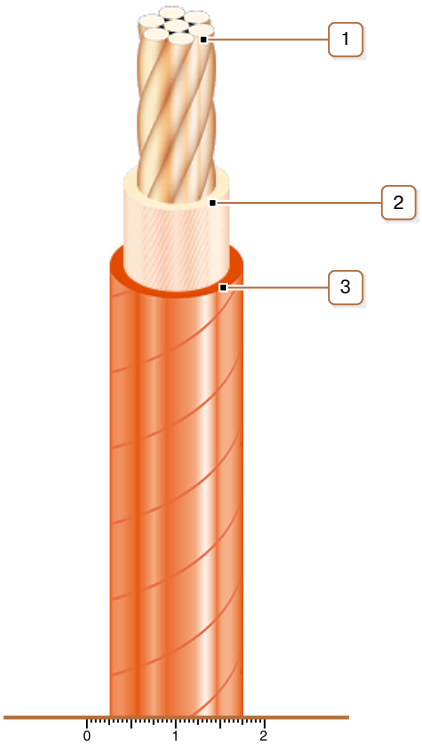

CONSTRUCTION

1. Copper multiwire conductor
2. Glass-tape winding
3. Polyimide-fluoroplastic film winding

© 2024 PJSC Yuzhcable Works. © 2024 A. Kevorkyan